19" Professional CCTV Monitor


Model:CH-LCD19A2K



Features

- 1. HD: 1920*1080 with higher definition than the normal monitor.
- 2. Turn on the screen to automatically detect the resolution of the input signal in the lower left corner of the screen.
- 3. Clear: delicate and realistic, conveying true colors, showing the true colors.
- 4. Bright: The quality is improved, only for better presentation.
- 5. Adopt industrial screen, high brightness, high contrast.
- 6. High-precision standard regulated power supply, specially designed for industrial equipment, supporting 24 hours × 365 days of uninterrupted work.
- 7. Adopt 10bit image chip processing technology, high pixel progressive scan, fine texture.
- 8. Support intelligent 3D noise reduction, eliminate afterimage function, dynamic brightness, contrast color optimization technology.
- 9. Apply the world's leading LED driver solution to accurately restore the front-end signal, with a strong sense of reality.
- 10. LED has small volume, low energy consumption, zero radiation, stable image, no impact on the eyes, natural health.
- 11. 5 ms extremely fast response, avoiding the tailing phenomenon of images in high speed operation.
- 12. Using nanotechnology, the picture is more three-dimensional, transparent.

Dimension

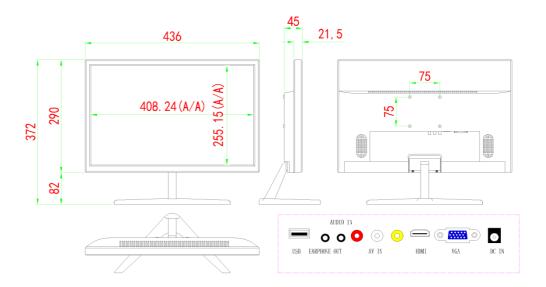

Specification

Product type: Professional Monitor
Product model: CH-LCD19A2K

Screen size: 19"
Screen type: LCD
Screen ratio: 16:10
Brightness: 300nit
Contrast ratio: 3000:1
Response time: 5 ms

Viewing area: 408. 24×255. 15 mm

Viewing angle: wide
Display color: 16.7M
Clearness: 1920*1080
Control method: panel

Input port: HDMI, VGA, RCA, audio output

Audio output: with stereo speaker

Head set hole: audio input Power supply: 12V/3A Total power: 20W Casing: fireproof plastic

Dimensions: 436*290 not including the foot height (foot height: 82mm)

Installation method: base, wall mount

Product weight: 2.5kg

Packing size: 510mm*95mm*393mm

Gross weight: 3.4kg

Packing size: 5pcs in 1 case 555*500*435mm

Gross weight: 18kg

Working environment temperature: 20°C is the most suitable

Working environment humidity: 10%-90%RH

Storage temperature: -20°C- 60°C