

24" Professional CCTV Monitor


Model:CH-LCD24A2K



Features

1. HD: 1920*1080 with higher definition than the normal monitor.
2. Turn on the screen to automatically detect the resolution of the input signal in the lower left corner of the screen.
3. Clear: delicate and realistic, conveying true colors, showing the true colors.
4. Bright: The quality is improved, only for better presentation.
5. Adopt industrial screen, high brightness, high contrast.
6. High-precision standard regulated power supply, specially designed for industrial equipment, supporting 24 hours x 365 days of uninterrupted work.
7. Adopt 10bit image chip processing technology, high pixel progressive scan, fine texture.
8. Support intelligent 3D noise reduction, eliminate afterimage function, dynamic brightness, contrast color optimization technology.
9. Apply the world's leading LED driver solution to accurately restore the front-end signal, with a strong sense of reality.
10. LED has small volume, low energy consumption, zero radiation, stable image, no impact on the eyes, natural health.
11. 1.5 ms extremely fast response, avoiding the tailing phenomenon of images in high speed operation.
12. Using nanotechnology, the picture is more three-dimensional, transparent.
13. Support Multi-language, including English, Chinese, Spanish, French, German, Portuguese, Italian, Russian, Mongolian.

Dimension

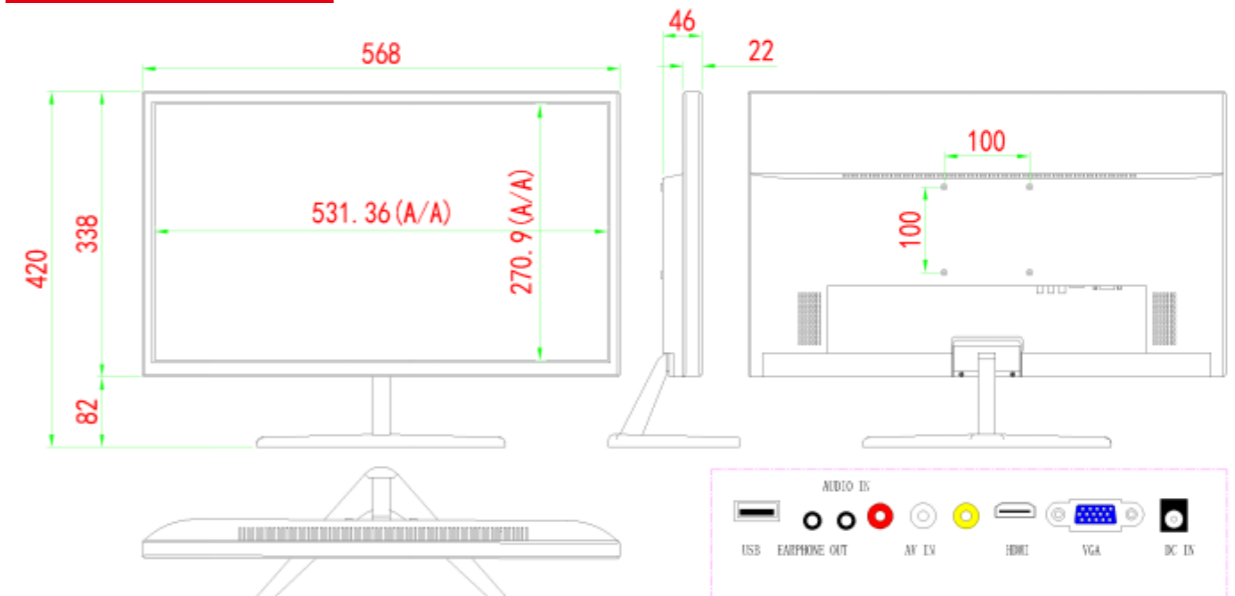

Specification

Product type: Professional Monitor

Product model: CH-LCD24A2K

Screen size: 24"

Screen type: LCD

Screen ratio: 16:9

Brightness: 300nit

Contrast ratio:3000:1

Response time:5 ms

Viewing area: 531.36x270.9 mm

Viewing angle: 160° / 170°

Display color: 16.7M

Clearness:1920*1080

Control method: panel

Input port: HDMI, VGA, RCA, USB

Audio output: with stereo speaker

Head set hole: audio input

Power supply: 12V/4A

Total power: 28W

Casing: fireproof plastic

Dimensions:568mm*338mm, not including the foot height (foot height: 82mm)

Installation method: base, wall mount

Product weight:3.2kg

Packing size:615mm*105mm*455mm

Gross weight: 4.2kg

Packing size:5pcs in 1 case 643mm*550mm*494mm

Gross weight:22kg

Working environment temperature:20°C is the most suitable

Working environment humidity: 10%-90%RH

Storage temperature:-20°C- 60°C